




OZ 100

MZ 100

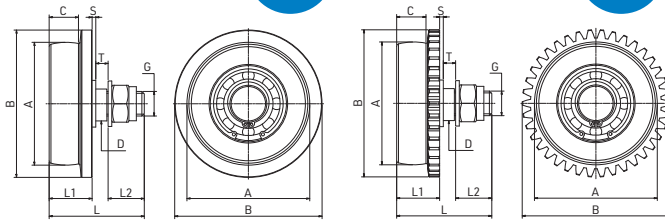

WHEELS FOR PRO-TROLLEY

Ready-to-fit wheels consisting of single-flange wheel, 2RS deep groove ball bearing, wheel axle and standard parts including self-locking nut. Made of robust and galvanised steel for long-lasting and corrosion-resistant use.

Technical data:

- 5 sizes, load capacities from 0.15 t to 1.4 t per wheel
- Suitable for straight and angled steel profiles
- Available in 2 versions: toothless 'OZ' or toothed 'MZ'

Special versions on request:

- Higher load capacities
- NIROSTA version

TYPE	OZ / MZ	Ø 45	Ø 60	Ø 80	Ø 100	Ø 125
Capacity	t	0.15	0.3	0.6	1.0	1.4
Barrel diameter A	Ø mm	45	60	80	100	125
Outer diameter B	Ø mm	60	75	100	120	150
Running width C	mm	15	17	21	24	28
Total length L	mm	44	53	65	78	93
Wheel width L1	mm	21	25	30	35	40
Thread length L2	mm	17	20	25	30	35
Bolt diameter D	Ø mm	15	18	23	28	33
Thread G		M10	M12	M16	M20	M24
Gap S	mm	2	2	2	3	3
Sheet thickness T min. - max.	mm	4 - 8	6 - 10	8 - 12	10 - 15	15 - 20
Number of teeth		-	23	31	38	48
Module		-	3	3	3	3
Weight	kg	0.3	0.6	1.2	2.3	4.1
OZ	Order No.	G59000	G59010	G59020	G59030	G59040
MZ	Order No.	-	G59011	G59021	G59031	G59041



BFZ 8



ROPE PULLEY | BFZ

Complete with rope - ready for use

Ready-to-use rope pulley, with forged hook, 2 clamps, galvanized with three adjacent steel rollers, complete with spiral-braided rope made of BIROTEX (PP multifilament, high-strength, low-twist).

TYPE	BFZ ...	8	10	12	16
Capacity	kg	200	250	350	500
Rope diameter	mm	8	10	12	16
Roller diameter	mm	50	60	80	100
Rope length	m	20	25	30	40
Roll thickness	mm	12	12	16	20
Order No.		H10270	H10271	H10272	H10273