

Compact electric rope winch



COMPACT ELECTRIC ROPE WINCH | PORTY-II



Electric rope winch as a hoist winch for material transport

Standard features:

- Incl. contactor control 3ph / 400V / 50Hz
- Incl. 40 m rope with thimble and eye load hook, ready mounted on winch
- Grooved drum
- Up to 80 m rope length in 7 layers
- Incl. control switch (2-button and emergency stop) on 3 m control cable
- Ambient temperature -10 to +40 °C
- Standard mechanism group acc.FEM 1,001: T4-L1 - M3(1Bm)
- Protection class IP54 (control button IP65)
- Frame components galvanized
- Incl. CEE plug on 3 m power supply cable
- 2 years warranty

Options:

- Protective drum cover
- Operational limit switch
- Drum pressure roller

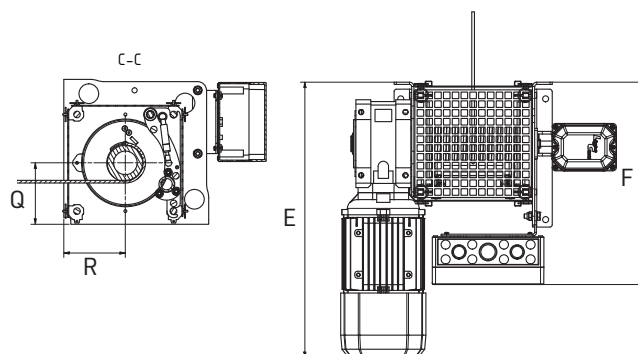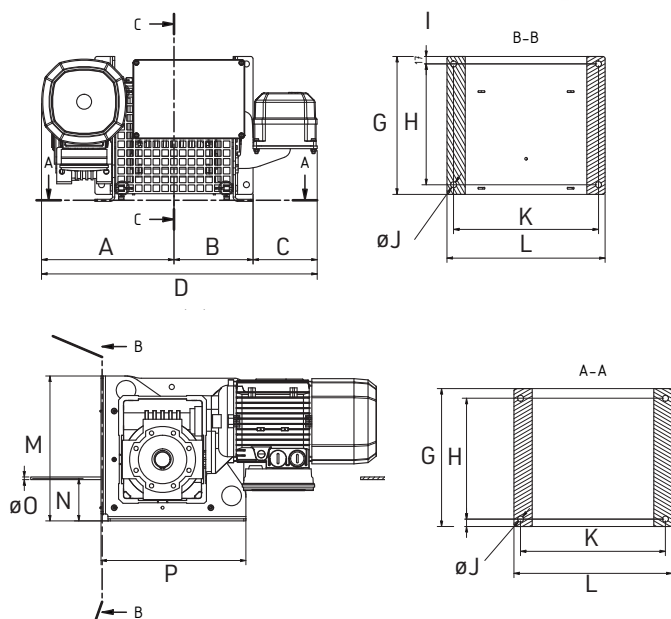

TYPE	PORTY-II	500
Lifting capacity 1st/2nd/3rd/4th/5th/6th/7th rope layer	kg	710/625/555/500/455/420/385
Rope length 1st/2nd/3rd/4th/5th/6th/7th rope layer	m	7/16/27/38/51/65/80
Rope speed 1st/2nd/3rd/4th/5th/6th/7th rope layer	approx. m/min	8/9/10/12/13/14/15
Rope diameter	mm	6
Motor power	kW	1.5
Dimensions (A)	mm	302
B	mm	180
C	mm	146
D	mm	628
E	m	627
F	mm	461
G	mm	314
H	mm	275

TYPE	PORTY-II	500
I	mm	17
J	mm	Ø 13.5
K	mm	330
L	mm	360
M	mm	330
N	mm	97
O	mm	Ø 6
P	mm	330
Q	mm	140
R	mm	140
DTR drum diameter	mm	80
Weight	kg	68
Order No.		H64110