



PEH-
KH-Lift



ELECTRIC CHAIN HOIST | **PEH-KH-LIFT**

The PLANETA PEH-KH-Lift is based on the PEH electric chain hoist and is ideally suited to the safe and speedy handling of loads with single-handed operation. The load (hook or other receptacle upon request) is permanently connected to the controller. In this way, the operator only needs one hand to operate the chain

hoist and to guide the load securely.

- Standard left and right hand operation
- Standard equipment with two lifting speeds
- Step less speed control with frequency inverter available (optional)
- Allows the controlled and perfected handling of different (incl. liquids) transport goods




Protection class IP65

A feature of the hoist and the control switch is the protection class IP65. It is dust proof and protected against water jets. As it is compact and robust designed, the GP is best suited for dusty environments as well as for outdoor operation.



Operation

Comfortable one-hand operation for fast and precise Positioning of the load.




Suspensions

Optional eye or hook suspension for the stationary use.



Power supply

CEE plug with cable as option.

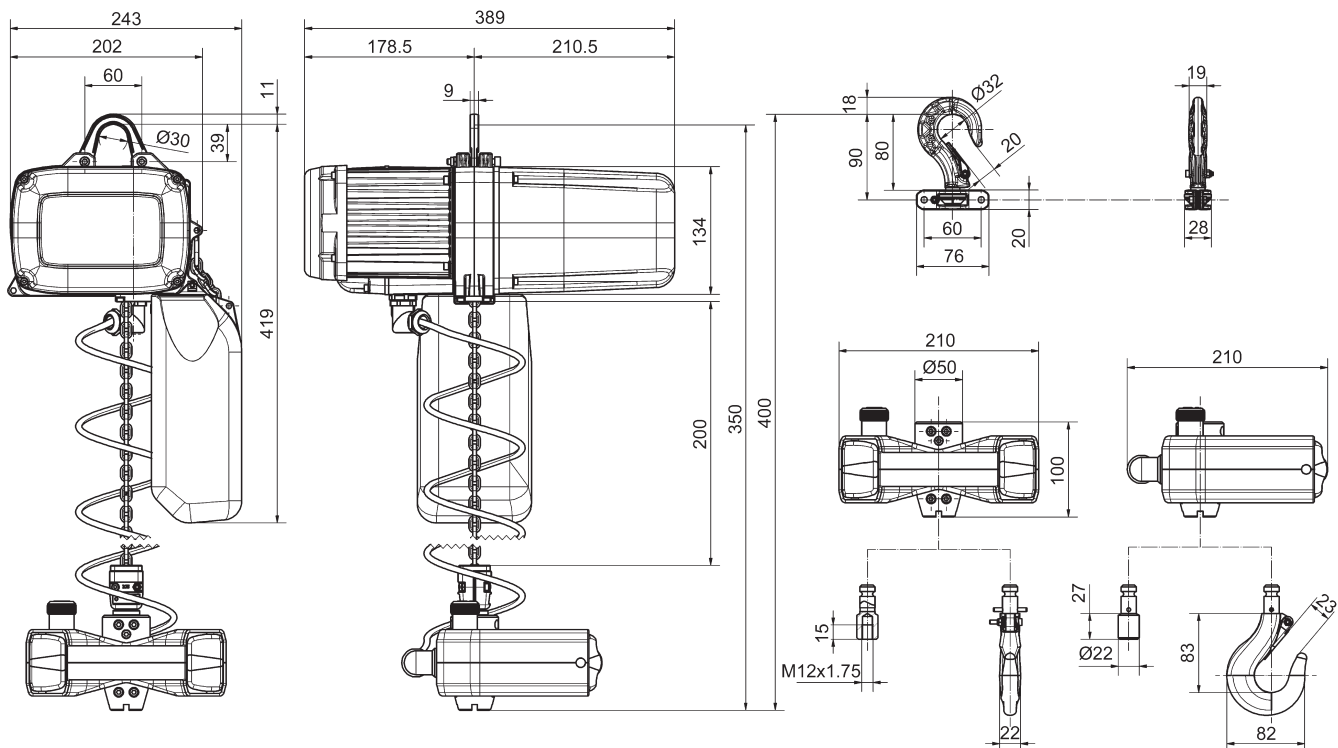

TYPE	Capacities in kg acc. ISO (FEM)*					Lifting speed with m/min.	Chain size mm	Motor power kW	3 × 400 V/50 Hz A	Weight with 3m lift kg	Order No.
	A5 (M5)	A6 (M6)	A6 (M6)	A6 (M6)	A6 (M6)						
PEH-KH Lift 250/1NF3	250	200	160	125	100	8/2	3.7 × 10.75	0.37/0.1	2.0/1.2	19	H20680
PEH-KH Lift 250/1SF3	125	100	80	-	-	16/4	3.7 × 10.75	0.37/0.1	2.0/1.2	19	H20681
PEH-KH Lift 500/1NF4	500	400	-	-	-	8/2	5.25 × 15	0.72/0.18	2.8/1.7	25	H20682
PEH-KH Lift 500/1SF4	250	200	-	-	-	16/4	5.25 × 15	0.72/0.18	2.8/1.7	25	H20683

* ISO (FEM) classification: Number of actuations on the control switch per hour