


Electric chain hoist



PEH-R




Clamping piece
and load hook
corrosion-resistant



Hook block
and Load hook
corrosion resistant

ELECTRIC CHAIN HOIST | PEH-R FOR THE FOOD INDUSTRY

- Load capacity: up to 1.250 kg
- Corrosion-resistant electric chain hoist
- Food industry, pharmaceutical industry, chemical industry, waste water treatment plants, outdoor use
- Cataphoresis-coated housing
- Corrosion-resistant round steel chain
- Corrosion-resistant suspension
- All parts in contact with the chain (equipment parts such as chain wheel, load hook, screws) in corrosion-resistant design
- Protection class IP65
- Special grease for the food industry
- Optional pressure relief valve
- Optional manual or motorised trolley in corrosion-resistant design

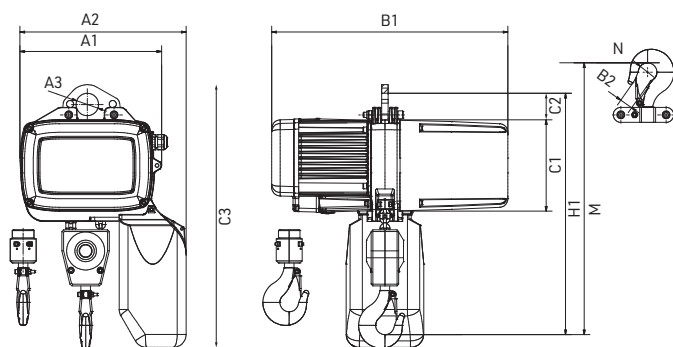

TYPE PEH-R ...	A1 mm	A2 mm	A3 mm	B1 mm	B2 mm	C1 mm	C2 mm	C3 mm	H1 mm	M mm	N mm
500/1N	246	296	Ø 40	444	22	162	56	452	424	489	36
500/1NF	246	296	Ø 40	444	22	162	56	452	424	489	36
500/2N	246	296	Ø 40	444	22	162	56	452	424	489	36
500/2NF	246	296	Ø 40	444	22	162	56	452	424	489	36
500/1N 1Ph	246	296	Ø 40	444	22	162	56	452	424	489	36
500/1NL 1Ph	246	296	Ø 40	444	22	162	56	452	424	489	36
500/2N 1Ph	246	296	Ø 40	444	22	162	56	452	424	489	36
500/2NL 1Ph	246	296	Ø 40	444	22	162	56	452	424	489	36
1000/1N	328	385	Ø 52	548	31	212	85	589	560	630	43
1000/1NF	328	385	Ø 52	548	31	212	85	589	560	630	43
1000/2N	328	385	Ø 52	548	31	212	85	589	560	630	43
1000/2NF	328	385	Ø 52	548	31	212	85	589	560	630	43

TYPE PEH-R ...	Capacities in kg		Lifting speed (m/min.)		Number of chain falls	Order No. PEH-R with 3 m lift	Order No. Add lift per m
	M4 (A4)	M5 (A5)	Main lift	Fine lift			
500/1N	320	250	8	-	1	H21570	H21582
500/1NF	320	250	8	2	1	H21571	H21582
500/2N	630	500	4	-	2	H21572	H21583
500/2NF	630	500	4	1	2	H21573	H21583
500/1N 1Ph	-	250	8	-	1	H21574	H21582
500/1NL 1Ph	320	250	4	-	1	H21575	H21582
500/2N 1Ph	-	500	4	-	2	H21576	H21583
500/2NL 1Ph	630	500	2	-	2	H21577	H21583
1000/1N	630	500	8	-	1	H21578	H21584
1000/1NF	630	500	8	2	1	H21579	H21584
1000/2N	1,250	1000	4	-	2	H21580	H21585
1000/2NF	1,250	1000	4	1	2	H21581	H21585

* ISO (FEM) classification: Number of actuations on the control switch per hour: M4 (A4) = 180 actuations per hour, 30 % ED, M5 (A5) = 240 actuations per hour, 40 % ED, M6 (A6) = 300 actuations per hour, 50 % ED, M7 (A7) = 360 actuations per hour, 60 % ED