


SPRING BALANCER | SERIE 600

- Starter models in the spring balancer range
- Robust aluminium pressure die-cast housing
- Flexible and resistant steel wire cable
- Precise and stepless adjustment of the load range
- Easily adjustable length of rope stroke
- Practical 2-point suspension for maximum safety
- With rope stopper and mounting snap hook
- Type 630-632 with handwheel, type 633-637 with fall protection safety device in case of spring breakage



630

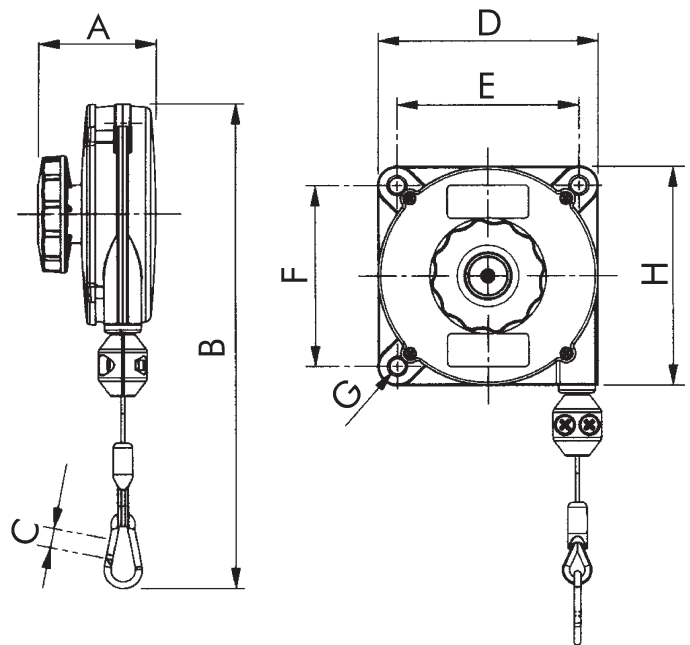

TYPE	Capacity kg	Rope length m	Rope-Ø mm	Weight kg	Dimensions in mm								Order No.
					A	B	C	D	E	F	G	H	
630	0.4 - 1	1.6	2	0.63	60	250	Ø 6	113	93	93	Ø 8	113	G30120
631	1 - 2	1.6	2	0.67	60	250	Ø 6	113	93	93	Ø 8	113	G30121
632	2 - 3	1.6	2	0.79	60	250	Ø 6	113	93	93	Ø 8	113	G30122
633	2 - 4	2.5	2.5	2.85	99.5	415	Ø 10	192	162.5	162.5	Ø 10	192	G30123
634	4 - 6	2.5	2.5	3	99.5	415	Ø 10	192	162.5	162.5	Ø 10	192	G30124
635	6 - 8	2.5	2.5	3.1	99.5	415	Ø 10	192	162.5	162.5	Ø 10	192	G30125
636	8 - 10	2.5	2.5	3.2	99.5	415	Ø 10	192	162.5	162.5	Ø 10	192	G30126
637	10 - 14	2.5	2.5	3.5	99.5	415	Ø 10	192	162.5	162.5	Ø 10	192	G30127