



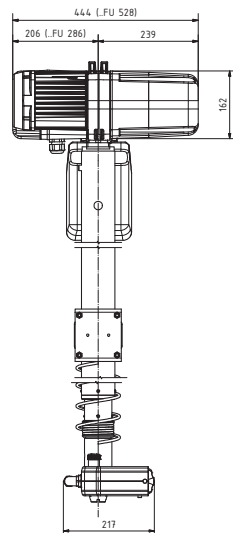


TELESCOPIC ELECTRIC CHAIN HOIST | PEH-HT

- Capacity up to 250 kg
- Telescopic handler for fast and precise positioning of loads
- Electric chain hoist operation and precise load guidance with one hand at the same time
- Ideally suited for eccentric loads
- Control unit with rocker switch for left and right-handed operation
- Hook end positions adjustable via geared limit switch
- Can be combined with articulated slewing crane or suspension crane
- Optionally with frequency converter
- Optional customised devices for load suspension
- Optionally with slack chain cut-off

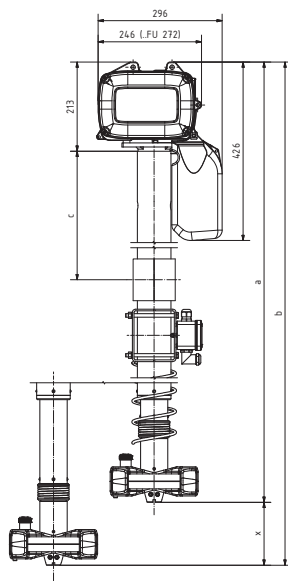

PEH-HT

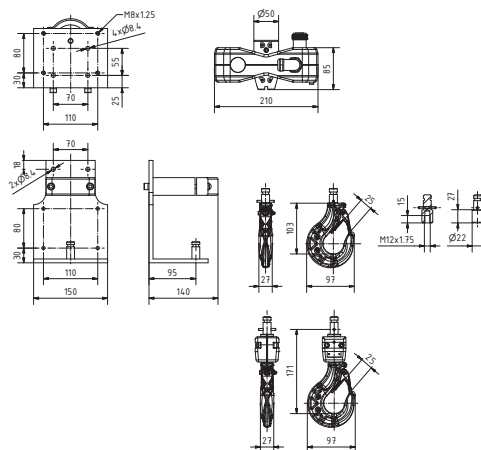

TYPE	Capacities in kg acc. ISO (FEM)*				Lifting speed with m/min.	Chain size mm	Motor power kW (50 Hz)	3 × 400 V 50 Hz A	Weight with 3m lift kg	Order No.
	A4 (M4)	A5 (M5)	A6 (M6)	A7 (M7)						
PEH-HT 500/NF	–	250	200	160	8/2	5.25 × 15	0.72/0.18	2.8/1.7	52	H21590
PEH-HT 500/SF	–	250	200	160	16/4	5.25 × 15	0.72/0.18	2.8/1.7	52	H21591
PEH-HT 500/NL FU	–	250	200	160	0.64–6.9	5.25 × 15	0.55	–	53	H21592
PEH-HT 500/SL FU	–	250	200	160	1.28–13.9	5.25 × 15	0.55	–	53	H21593

* ISO (FEM) classification: Number of actuations on the control switch per hour, A4 (M4) = 180 actuations per hour, 30 % ED, A5 (M5) = 240 actuations per hour, 40 % ED, A6 (M6) = 300 actuations per hour, 50 % ED, A7 (M7) = 360 actuations per hour, 60 % ED