

ALUMINIUM-LEVER HOIST | PAH

The new PLANETA PAH aluminium ratchet lever hoist is an essential tool in industrial and service applications thanks to its very small and light design.

A closed, well-designed aluminium die-cast housing protects the inner components against dirt. Equipped with two robust hook clips, the PAH meets all safety requirements and guarantees safe work.

The new robust chain end piece provides additional safety because the chain cannot be pulled through the device in this way.

A release lever enables the chain to be pulled through quickly when not under load. Usable at ambient temperatures from -20 °C to +60 °C.

Tempered and galvanized chain according to DIN EN 818-7-T. Hand lever with rubber handle (only in the case of capacities 250 kg/ 500 kg).

Optional: With RFID chip for digital equipment testing. More on page 08.





Incl. practical carrying bag for the PAH 250 & 500 versions



PAH 250 KG

PAH 500 – 3,000 kg

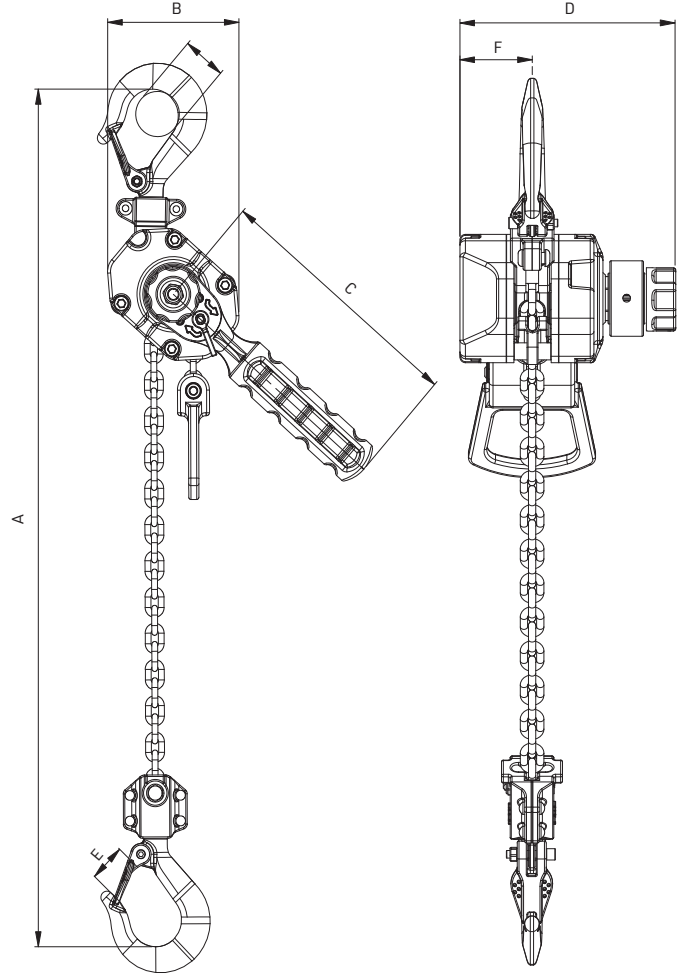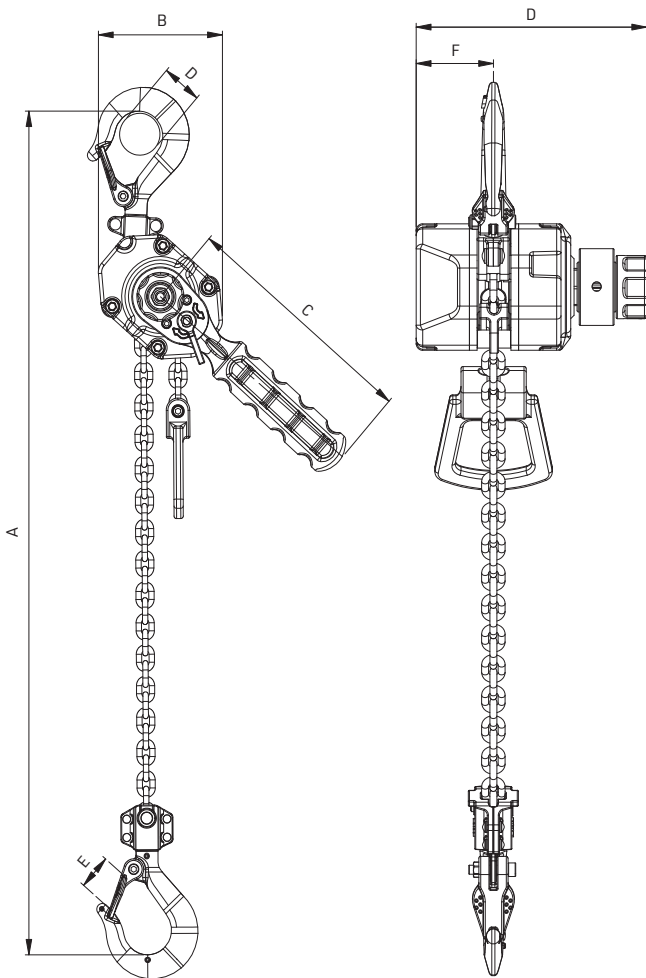

TYPE	PAH ...	250	500	800	1600	3200
Capacity	kg	250	500	800	1,600	3,200
Standard lift	m	1.5	1.5	1.5	1.5	1.5
Min. headroom (A)	mm	223	282	329	355	445
Lever force at 100 % load	daN	17	20	22	25	34
Number of chain falls		1	1	1	1	1
Chain size	mm	3 × 9	4 × 12	5.6 × 17	7.1 × 21	9 × 27*
B (Dimensions)	mm	74	90	115	140	170
C	mm	142	175	233	233	350
D	mm	30	35	39	44	60
E	mm	20	22	28	30	41
F	mm	36	40	55	70	88
G	mm	105	117	140	158	185
Weight with standard lift	kg	1.6	2.7	5.1	7.6	14.7
Weight for 1 m additional lifting height	kg	0.2	0.4	0.7	1.1	1.8
PAH ... with 1.5 m lift	Order No.	G10460	G10461	G10462	G10463	G10464
PAH ... with 3 m lift	Order No.	G10460-3	G10461-3	G10462-3	G10463-3	G10464-3
PAH ... with 6 m lift	Order No.	G10460-6	G10461-6	G10462-6	G10463-6	G10464-6
Additional 1 m lift	Order No.	G10465	G10007	G10086	G10087	G10249
RFID-Chip incl. mounting	Order No.	G10601	G10601	G10601	G10601	G10601

* Grade 100