




HORIZONTAL PLATE CLAMP | **HPC-2**

Standard sheet metal lifting clamp for the horizontal transportation of individual sheets through use in pairs as a minimum. Produced from tempered steel. Suitable for surfaces up to a hardness of 35 HRC. Observe load reduction depending on working angle!

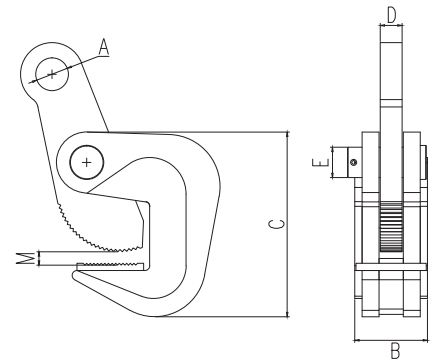

Set consisting of 2 pieces.




TYPE	Capacity* kg	Grip range mm	Dimensions mm					Weight ca. kg	Order No.
			A	B	C	D	E		
HPC-2-1	1.000	0 - 30	25	54	140	14	22	4	F00935
HPC-2-2	2.000	0 - 50	27	62	164	18	25	5,7	F00936
HPC-2-3	3.000	0 - 60	30	69	193	20	27	7,6	F00937
HPC-2-5	5.000	10 - 80	37	73	233	22	28	11,5	F00938
HPC-2-6	6.000	10 - 100	37	81	280	22	30	14,5	F00939

* Capacity per pair



HORIZONTAL PLATE CLAMP | **HPC-4**

Sheet metal lifting clamp for transporting support profiles or individual metal sheets horizontally and turning these to vertical. Locking through spring pre-tensioning. Simple opening through lifting mechanism with grip ring. Produced from tempered steel. Suitable for surfaces up to a hardness of 35 HRC.

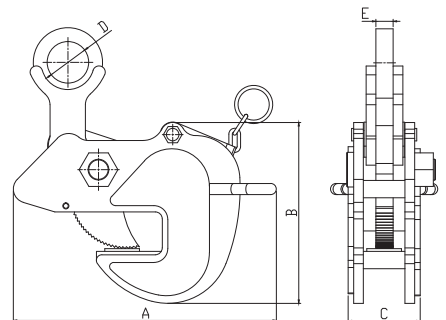

Set consisting of 2 pieces.



TYPE	Capacity* kg	Grip range mm	Dimensions mm					Weight ca. kg	Order No.
			A	B	C	D	E		
HPC-4-0,5	500	0 - 25	235	122	54	44	16	3,2	F00944
HPC-4-1	1.000	0 - 25	262	155	60	50	16	5,3	F00945
HPC-4-2	2.000	0 - 30	280	177	72	56	18	7,9	F00946
HPC-4-3	3.000	0 - 38	315	209	88	58	22	10,5	F00947
HPC-4-5	5.000	0 - 40	380	261	104	60	28	27,6	F00948

* Capacity per pair