

Hoists and winches since 1861



MINI-ALUMINIUM
MANUAL CHAIN HOIST
PAC360





Option: PAC360 with chain bag

#### MINI-ALUMINIUM-MANUAL CHAIN HOIST | PAC360

# Experience innovation and efficiency with the PAC360 mini aluminium manual chain hoist. Why PAC360?

#### Compact, lightweight and portable

The PAC360 is ideal for mobile use. Its low weight and compact design make it an indispensable an indispensable companion in any situation.

#### Robust and durable

The one-piece aluminium housing ensures maximum stability and durability, even under the toughest conditions.

## Innovative 360° rotating hand chain guide.

Experience the freedom and flexibility of the 360° freely rotating hand chain guide, which makes working from any position easier.

#### Low hand chain pull forces

Minimum effort required for maximum lifting performance, in the case of protection through overload protection.

#### Larger hook openings

More application options for a wide range of industrial sectors thanks to the more flexible hooks.

#### High work safety.

The flexible handling and variable working angle allow you to work in safe areas, even near heavy loads.

#### Low overall height.

Perfect for confined spaces and demanding locations where space is at a premium.

#### Galvanised hand chain

Maximum corrosion protection and reliability, even in harsh environments.

## Chain in accordance with DIN EN 818-7-T

Premium quality and safety, certified according to international standards.


#### Technical data:

- Capacities from 250 kg to 500 kg
- Standard lift: 3 m
- Hand chain: 2.5 m
- Freely rotatable 360° rotating hand chain guide
- Chain according to DIN EN 818-7 T
- Swivelling top and bottom hook
- Galvanised hand chain
- Overload protection

#### Option:


• Chain bag



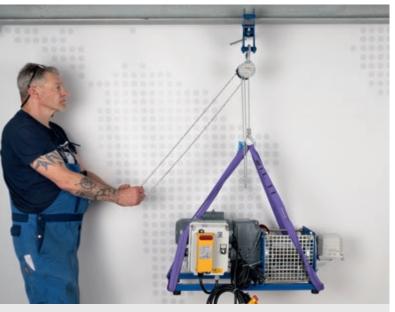


**Application example:** Operator standing to the left of the load



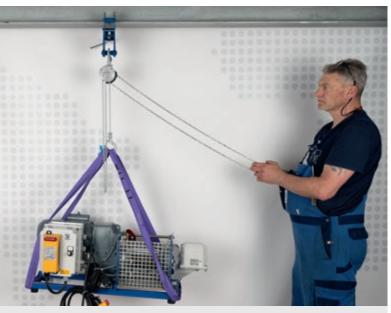


Application example: Operator standing to the right of the load

### Manual chain hoist

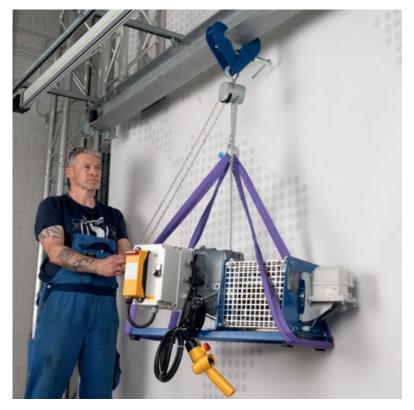



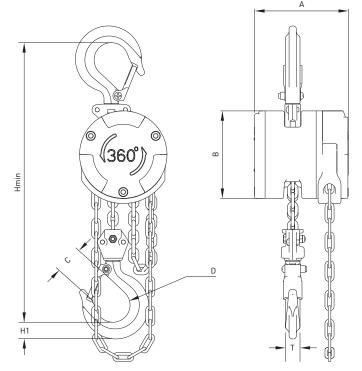

ТҮРЕ	PAC360	250	500
Capacity	kg	250	500
Standard lift	m	3	3
Min. headroom (Hmin)	mm	263	290
Hand chain force	daN	15	19
Hand chain operation length (F)	m	2.5	2.5
Meters hand chain to pull to lift 1 m	m	33.2	60.8
Number of chain falls		1	1
Chain size	mm	3.2 × 9	4.3 × 12
A (Dimensions)	mm	91	103
В	mm	84	104
С	mm	20	25
D	mm	33	33
T	mm	12	16
H1	mm	16	20
Weight with standard lift	kg	1.8	2.8
Weight for 1 m add. lifting height	kg	0.6	0.7
PAC360 with 3 m lift	Order No.	G10480	G10481
Additional 1 m lift**	Order No.	G10485	G10486
Chain box	Order No.	S10490	S10490
			'

<sup>\*\* 1</sup> m operating lenght and 1 m lift



#### PLANETA - Hebetechnik GmbH

Resser Straße 17  $\cdot$  44653 Herne  $\cdot$  Germany  $\cdot$  Phone: +49 (0) 2325 9580 0  $\cdot$  Fax: +49 (0) 2325 77077







